



Flix Poster

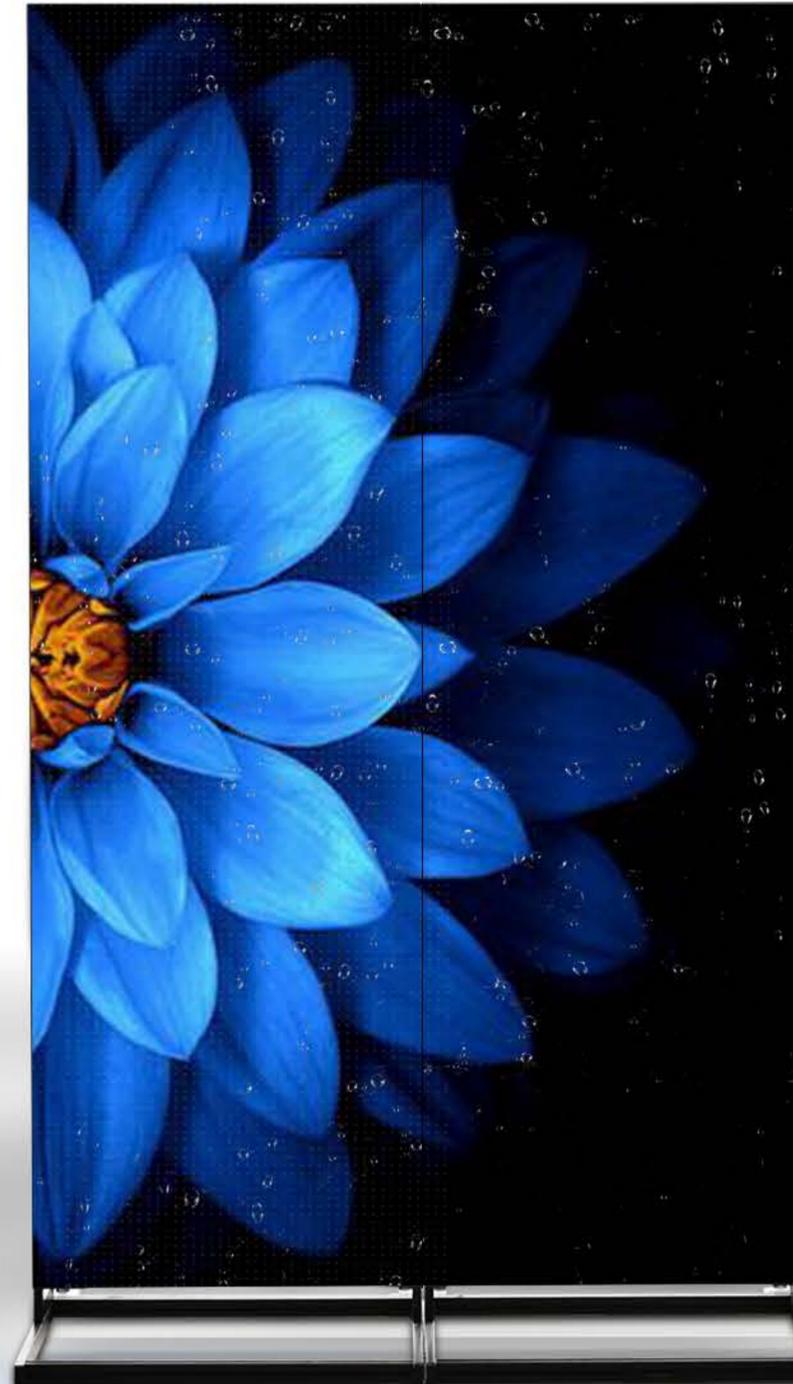

Schlank, Smart & Simpel.

Werbe **fliX**[®] INDOOR

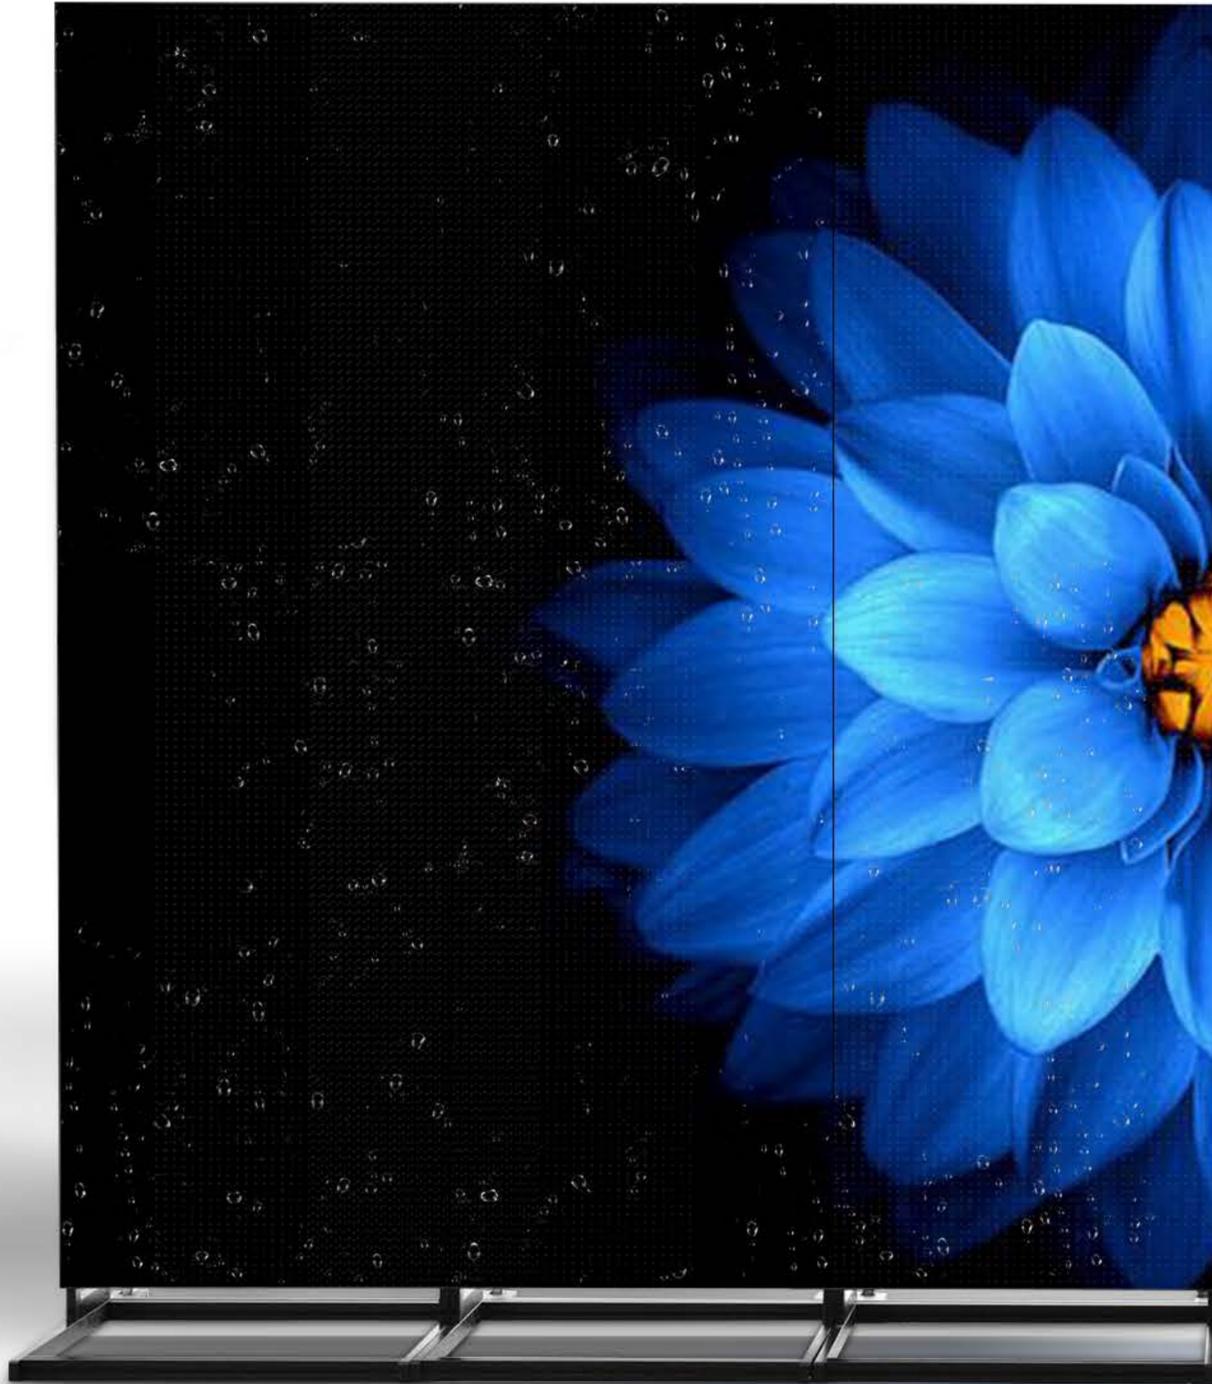

Einzigartiges Design und stabile Leistung ✓

leichter und ultradünner Rahmen ✓

Intelligente Steuerung und Kaskade mit mehreren Einheiten ✓

Vielseitige Einsatzmöglichkeiten ✓

Schutzklasse IP20 ✓

Werbe **fliX**[®] iOUTDOOR



Einzigartiges Design und stabile Leistung ✓

Wasserfest ✓

Intelligente Steuerung und Kaskade mit mehreren Einheiten ✓

Vielseitige Einsatzmöglichkeiten ✓

Schutzklasse IP65 ✓

Werbe **fliX**[®] | STABILE LEISTUNG

100%


Temperatur und Feuchtigkeitstest



FCC/CE/ROHS zertifiziert

100%

Produktalterungstest

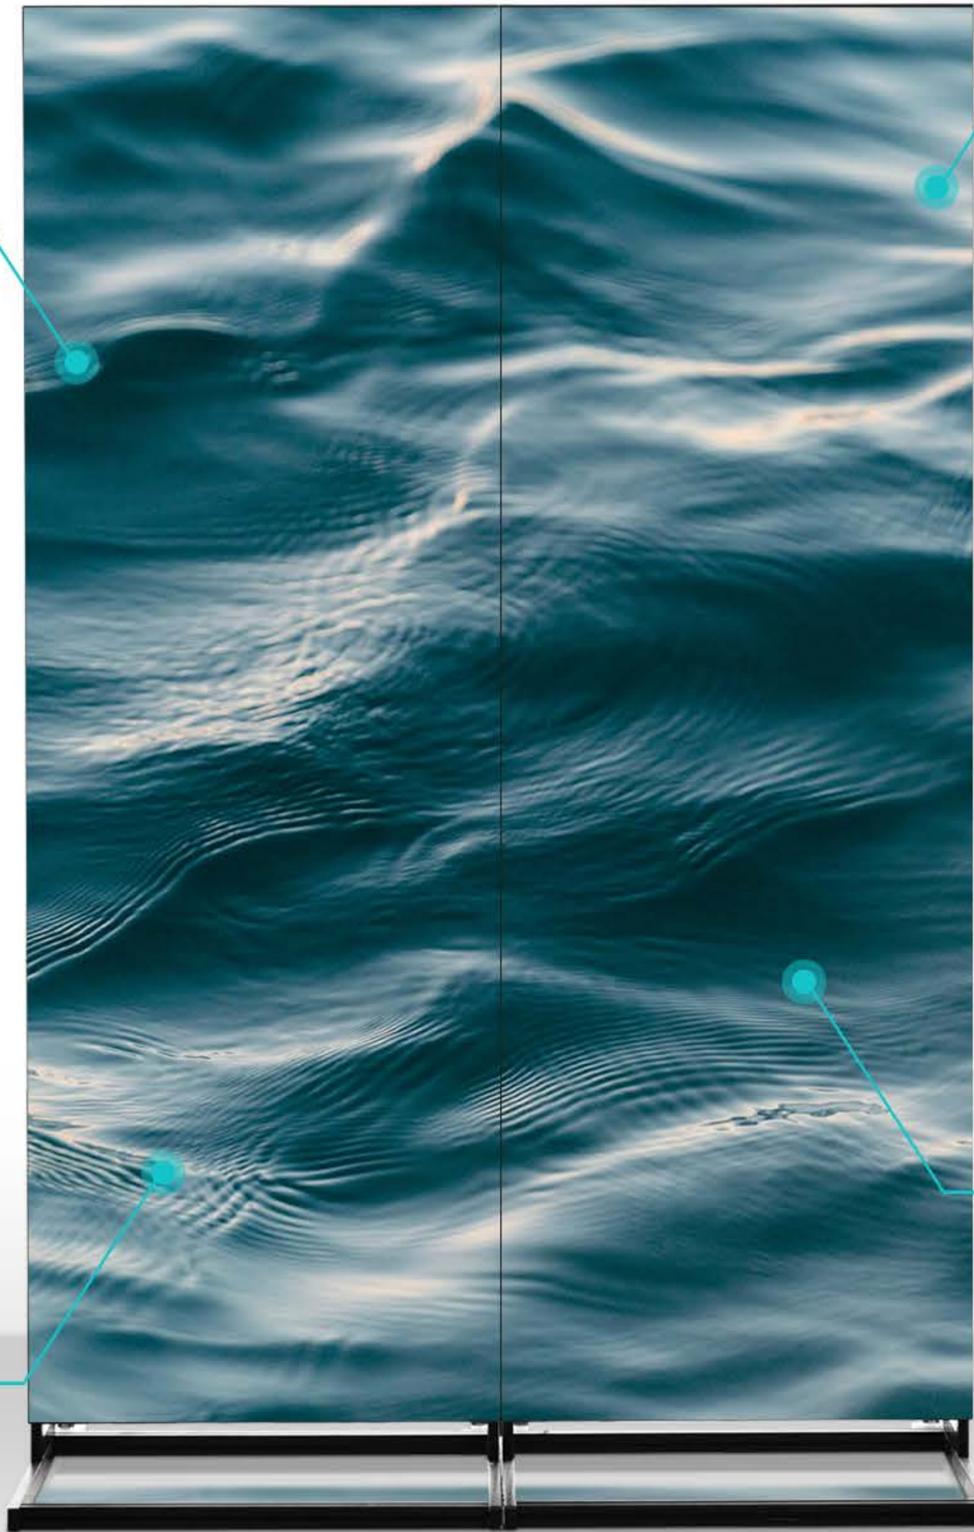

100%

QC passed





100%

Vibrationstest

FLIX LED POSTER

Werbe **fliX**[®] ANSTEUERUNG

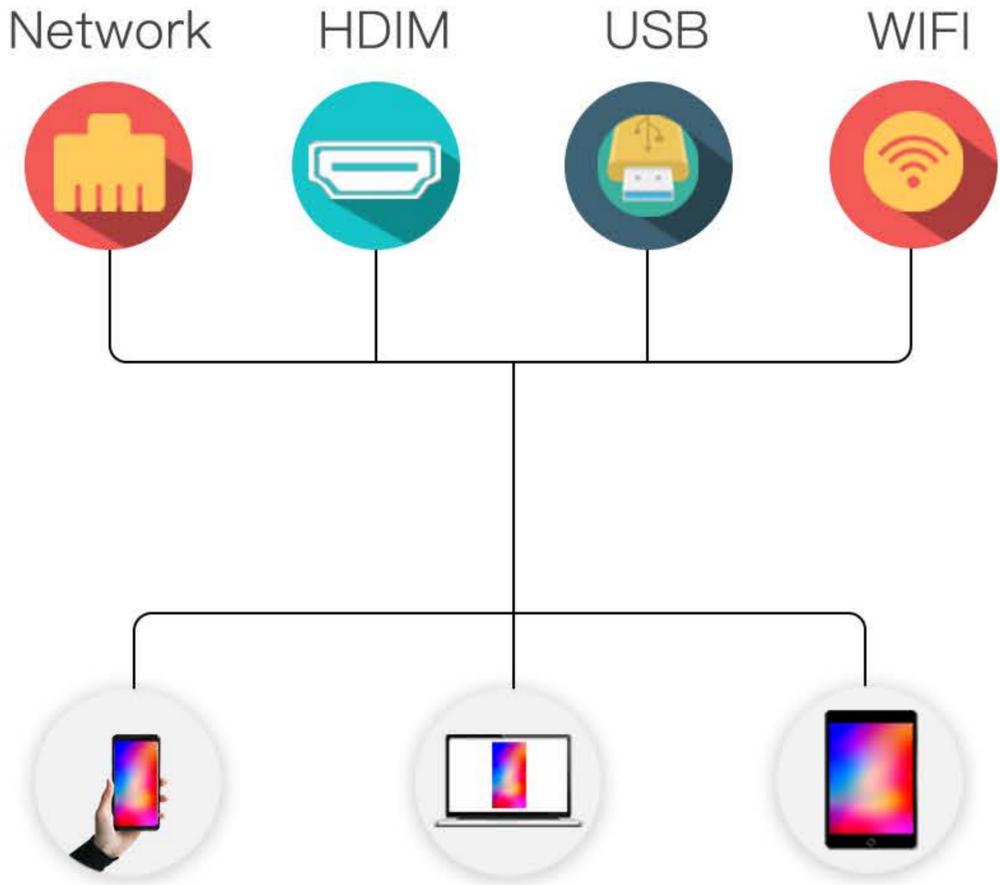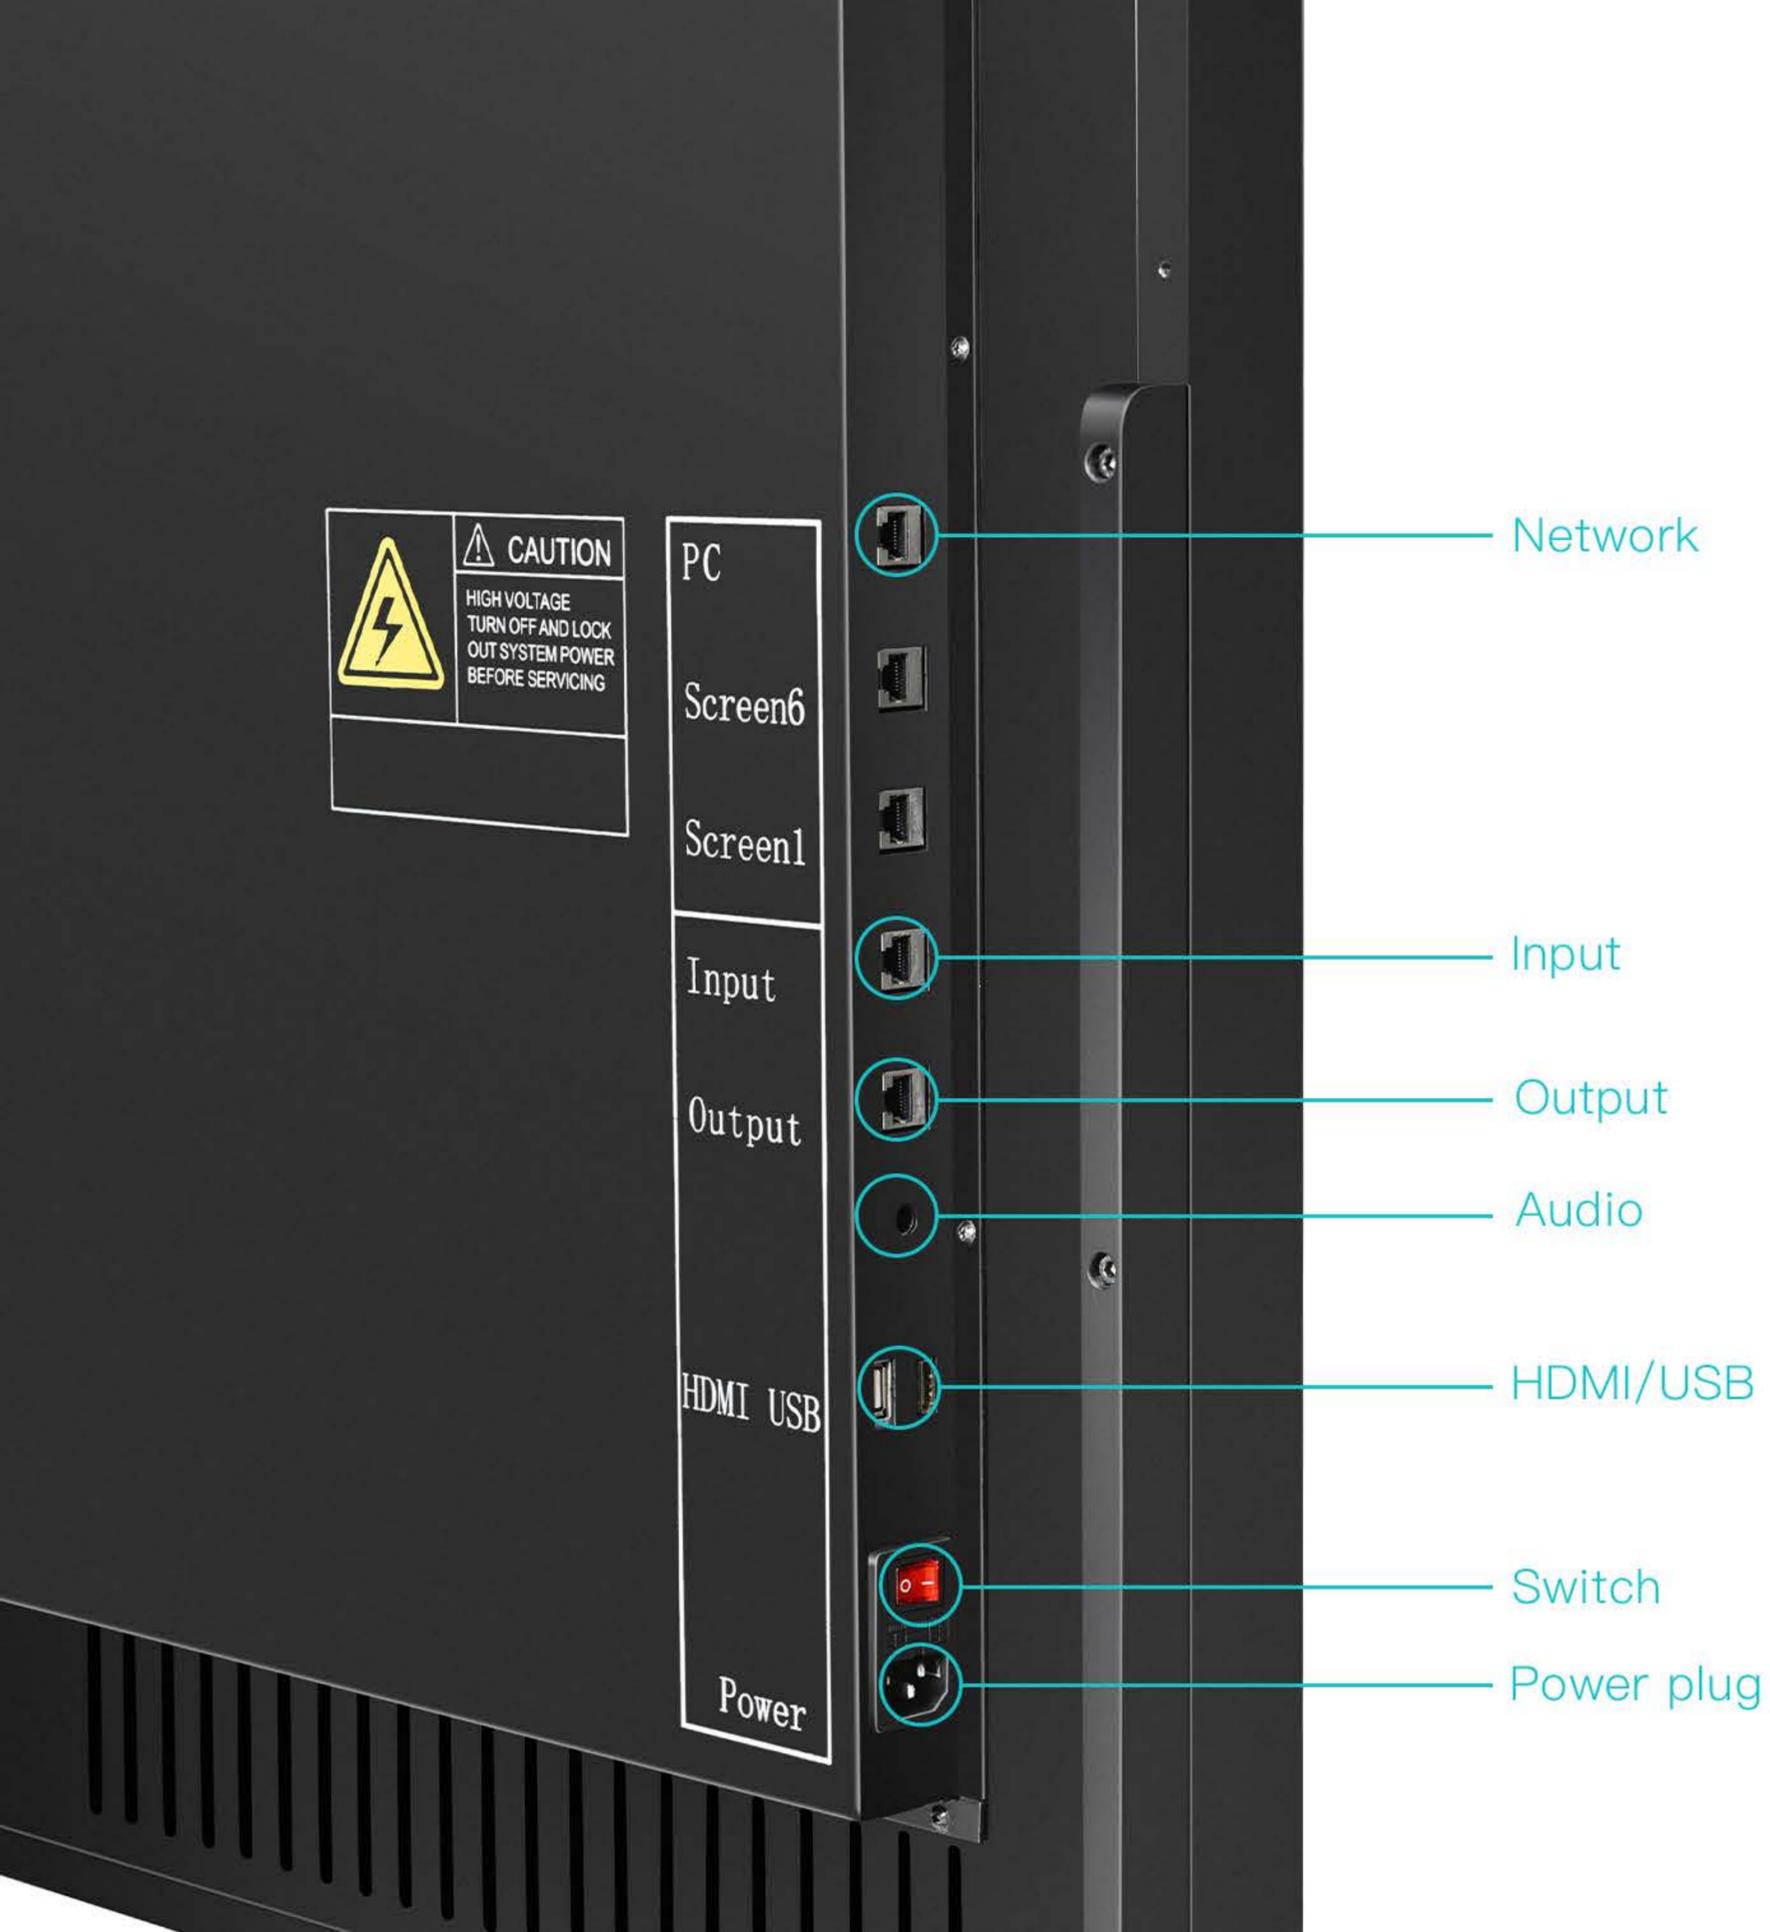

Integrierter Media Player

Vergrößern und verkleinern in Echtzeit

MOBILE APP-CONTROL


Unterstützt USB/W-LAN

Mit HDMI-Schnittstelle und Audi

Werbe **fliX**[®] INDOOR UND OUTDOOR

OUTDOOR LED FLIX POSTER

INDOOR LED FLIX POSTER

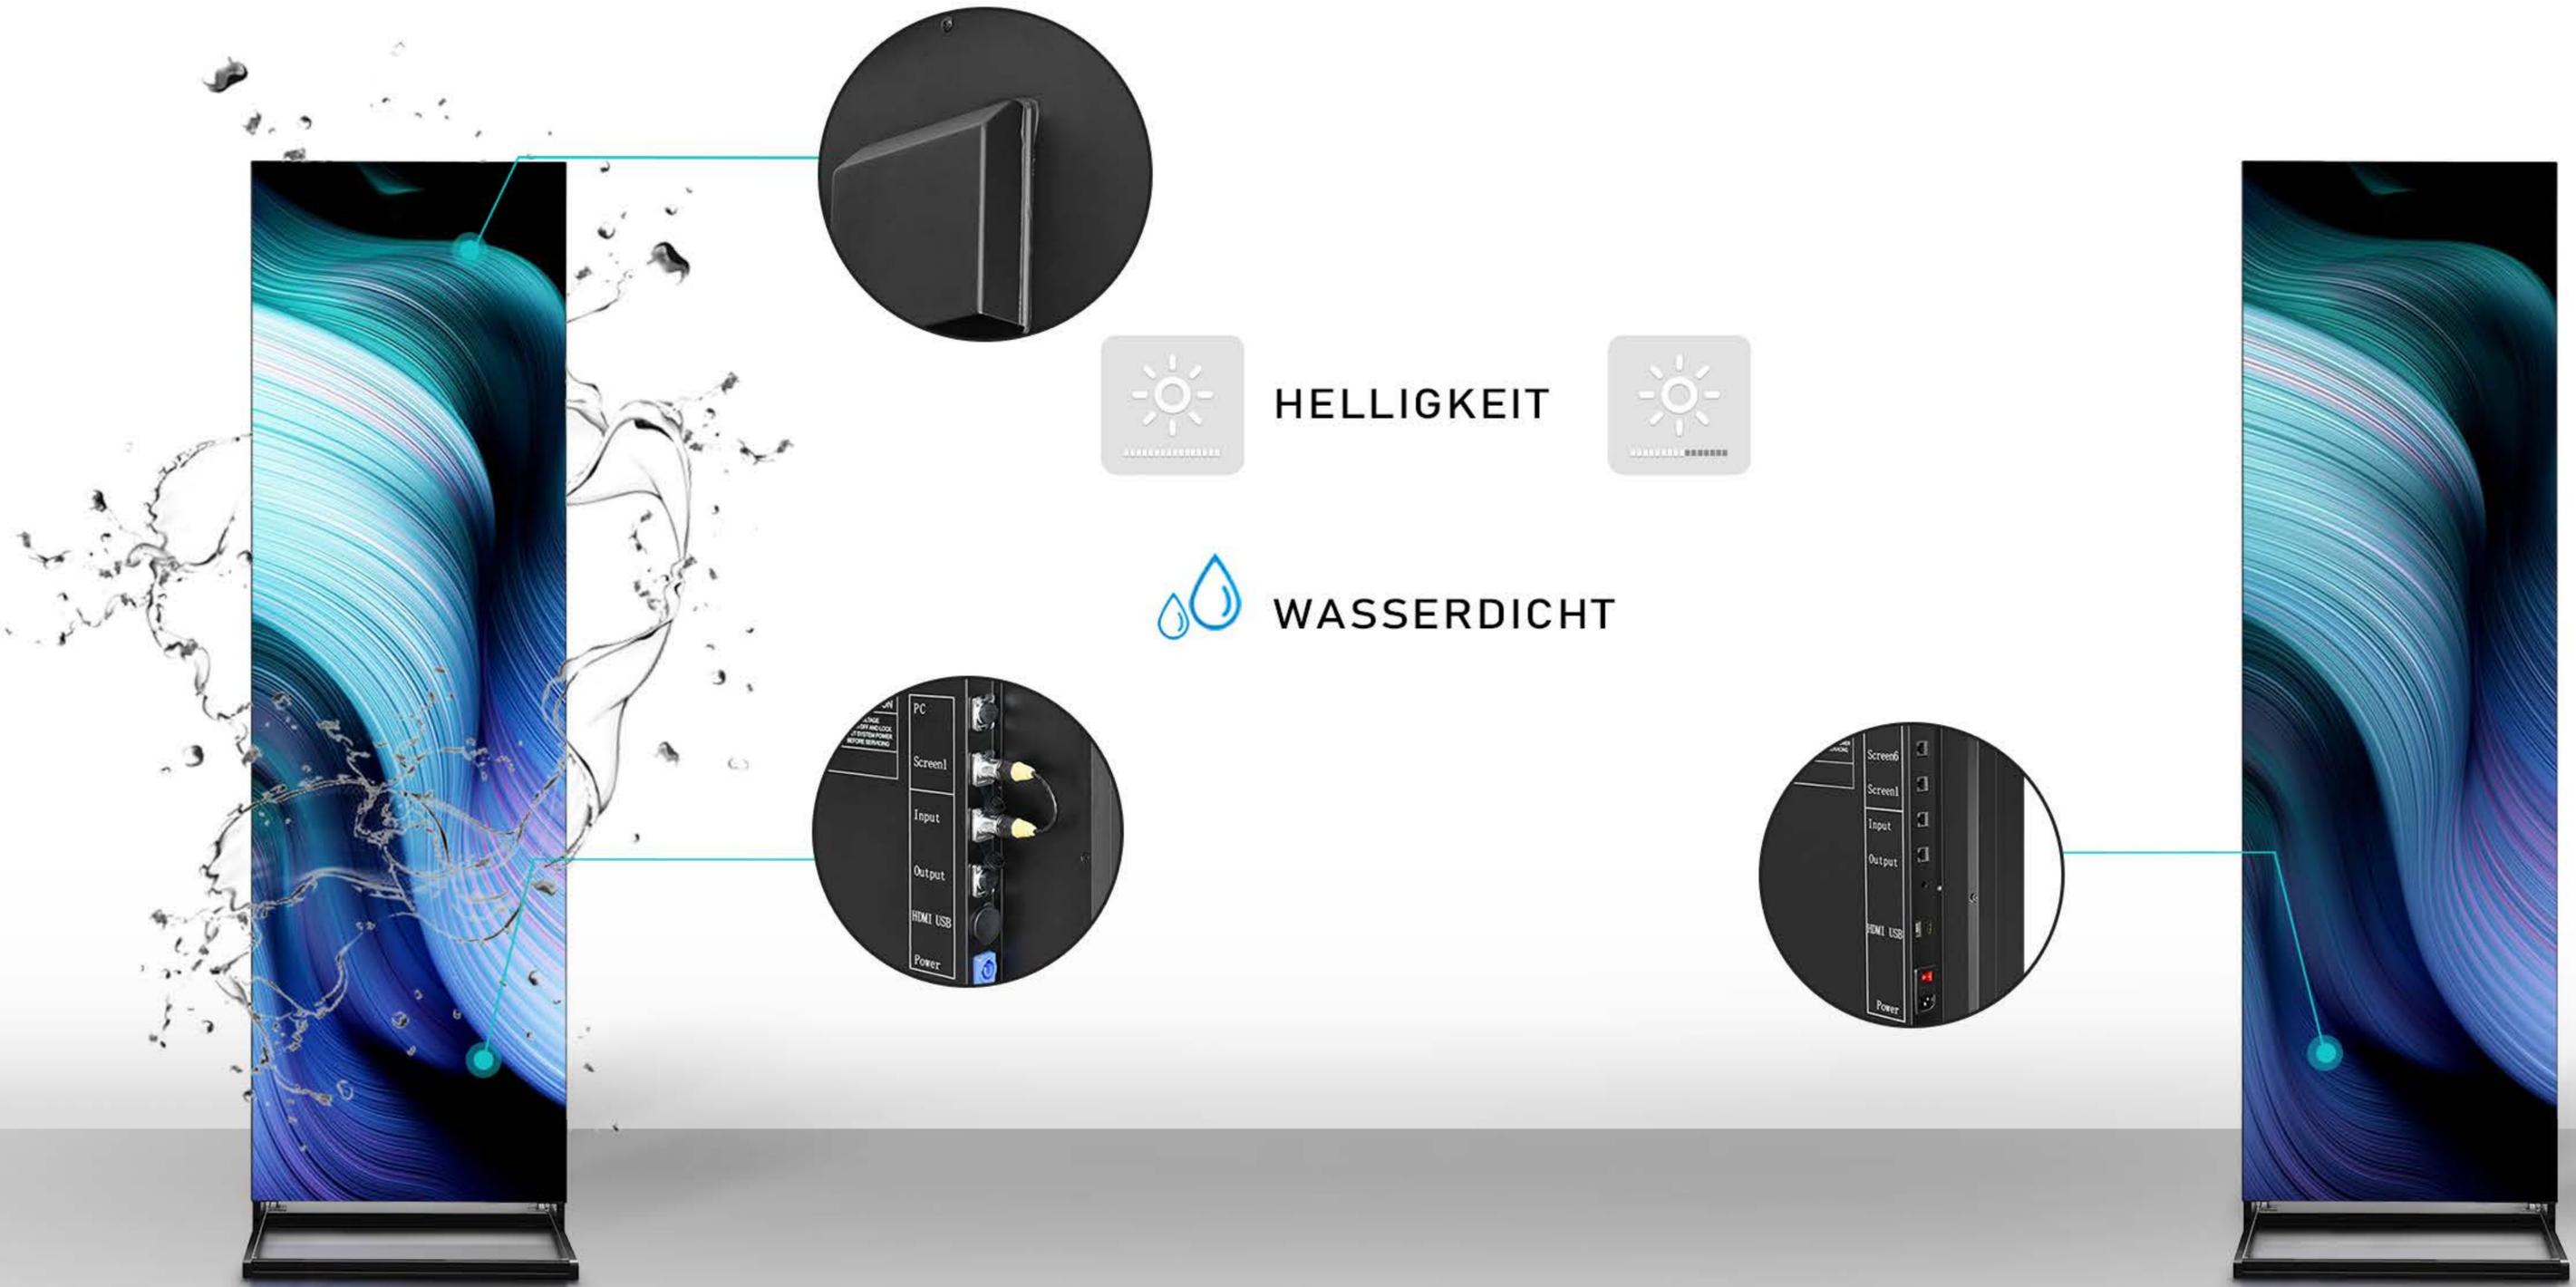

Werbe **flix**[®] | AUFSTELLVARIANTEN

Freistehend



Wandmontage



Hängend




Kreative Zusammenstellung



Werbe **fliX**[®] | PLUG & PLAY

Spielt Texte, Bilder und Videos
automatisch ab.

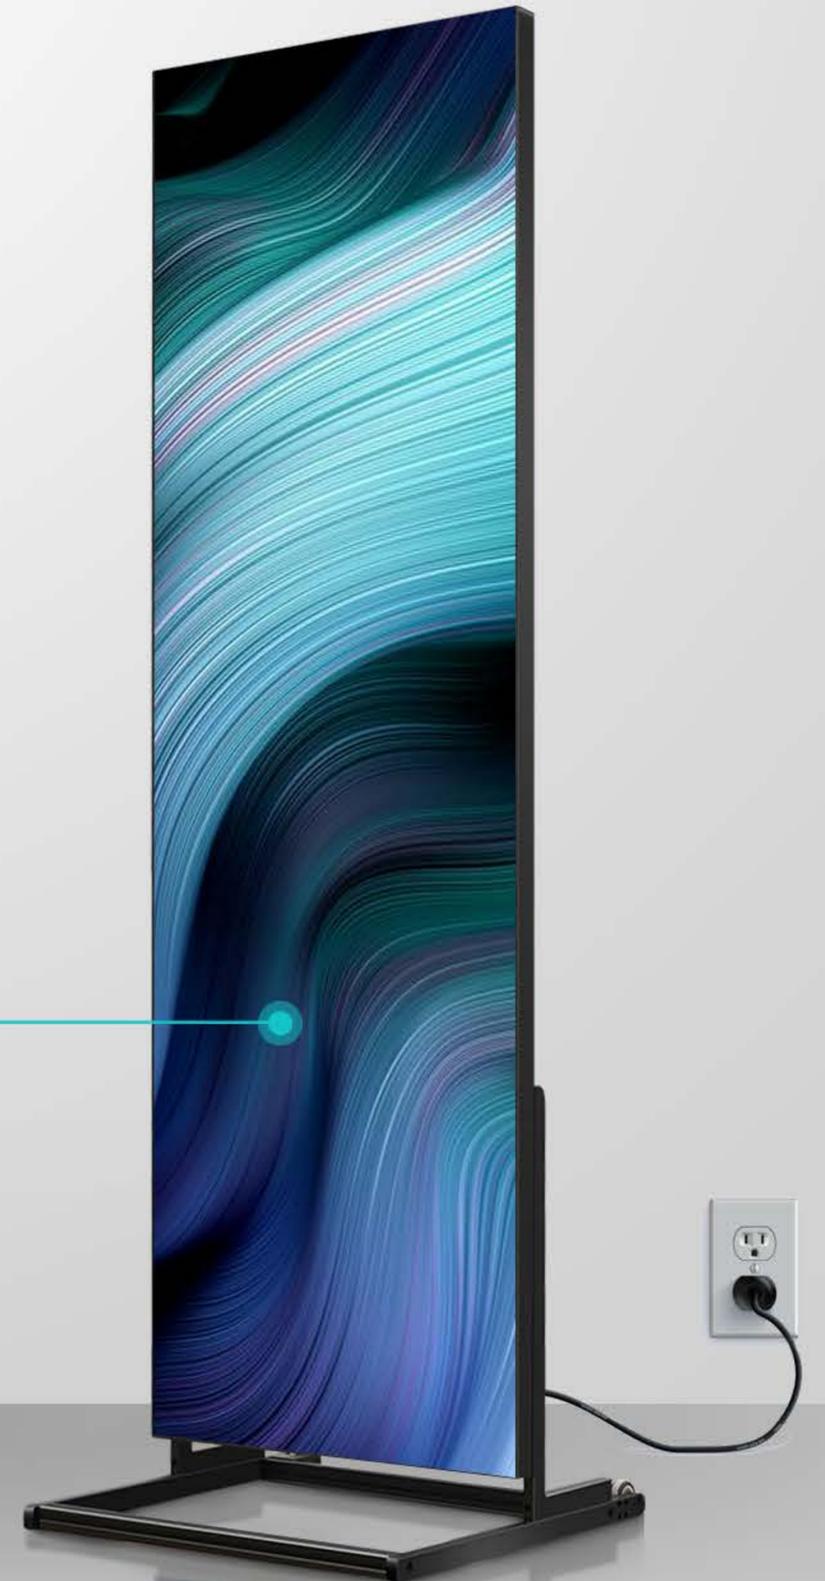


Werbe **fliX**[®] LEICHT UND ULTRA-DÜNN



1

2

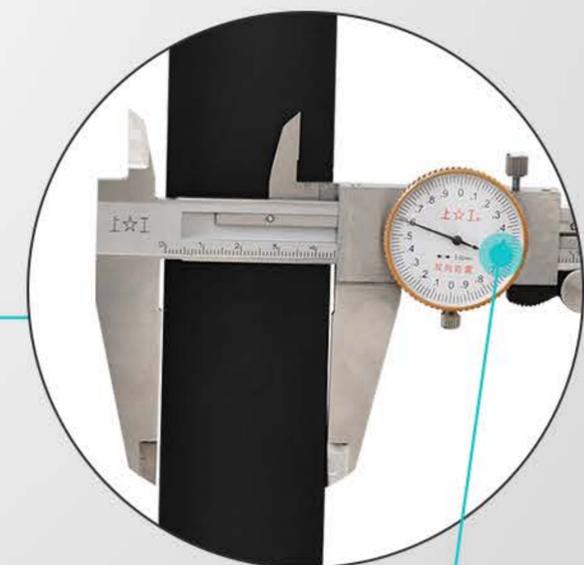

45mm

38kg

Werbe **fliX**[®] HELLIGKEITSSTEUERUNG




◀ AUTOMATISCHE HELLIGKEITSEINSTELLUNG ▶



Werbe **fliX**[®] | MULTI-SCREEN

- LEICHT & SLIM ✓
- SEHR HOHE AUFLÖSUNG ✓
- ULTRA-DÜNN ✓

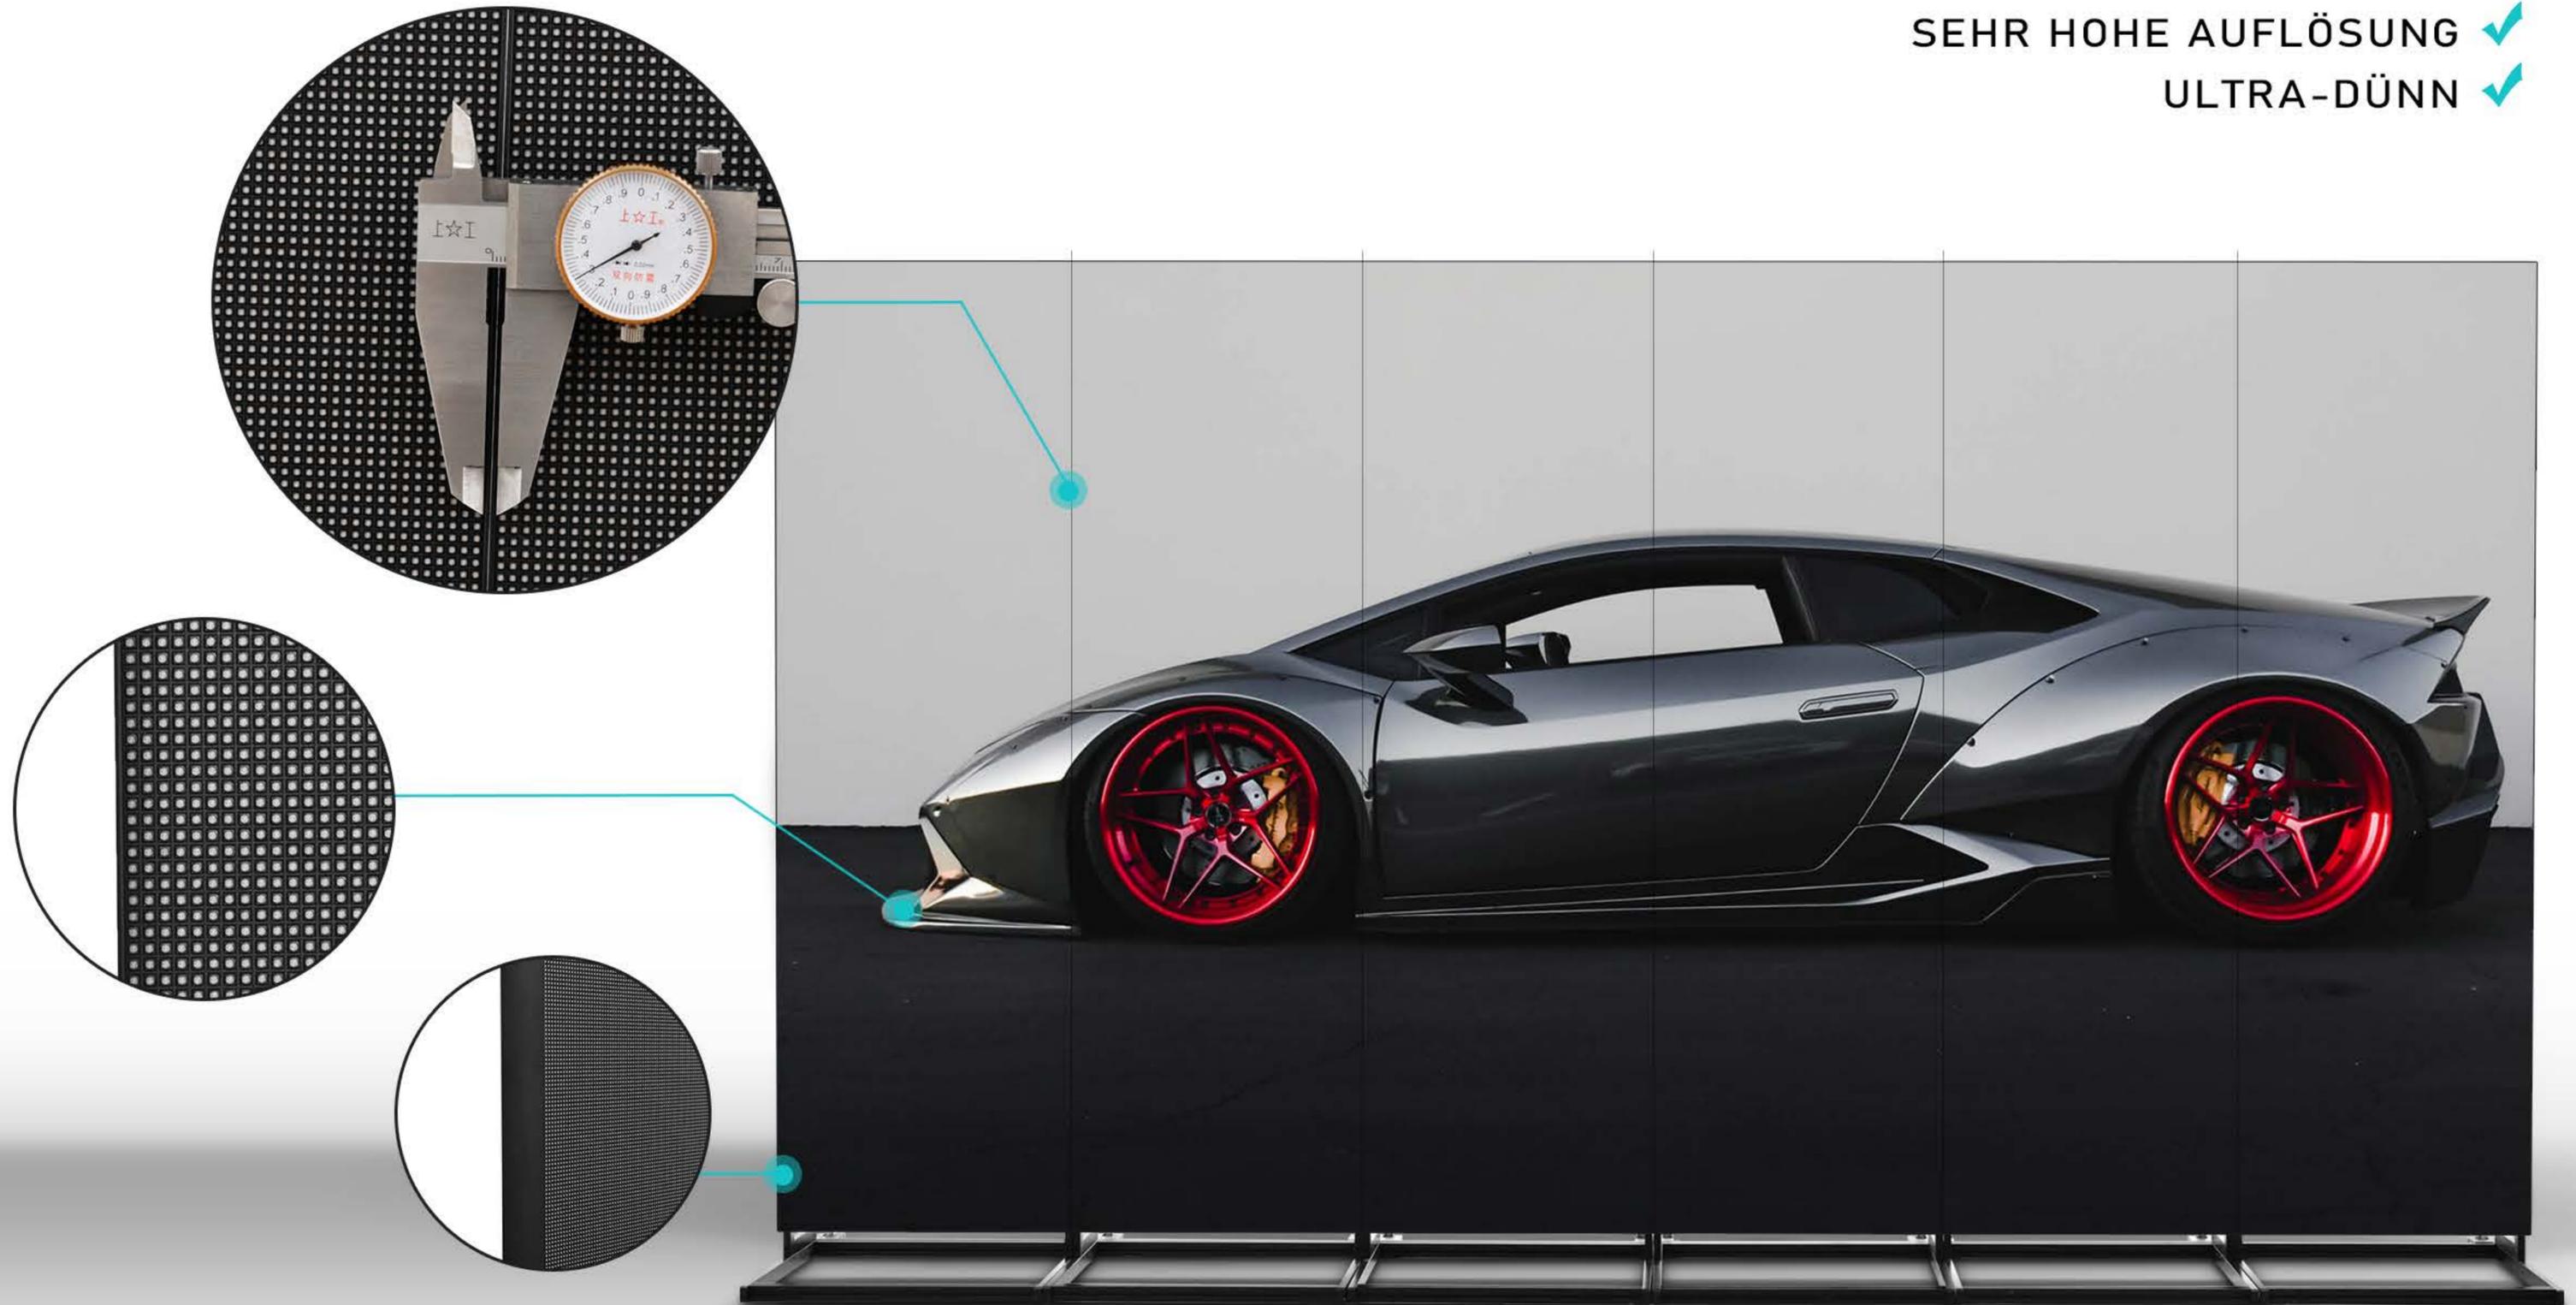


Werbe **fliX**[®] i CUSTOMIZED SERVICE




- LOGO ✓
- FORMAT ✓
- SYSTEM ✓

Werbe **fliX**[®] | EINSATZMÖGLICHKEITEN

- ✓  SHOPPING MALLS
- ✓  HOTELS
- ✓  BANK
- ✓  BARS
- ✓  STORES
- ✓  RESTAURANTS
- ✓  EXHIBITIONS
- ✓  EVENTS

.....



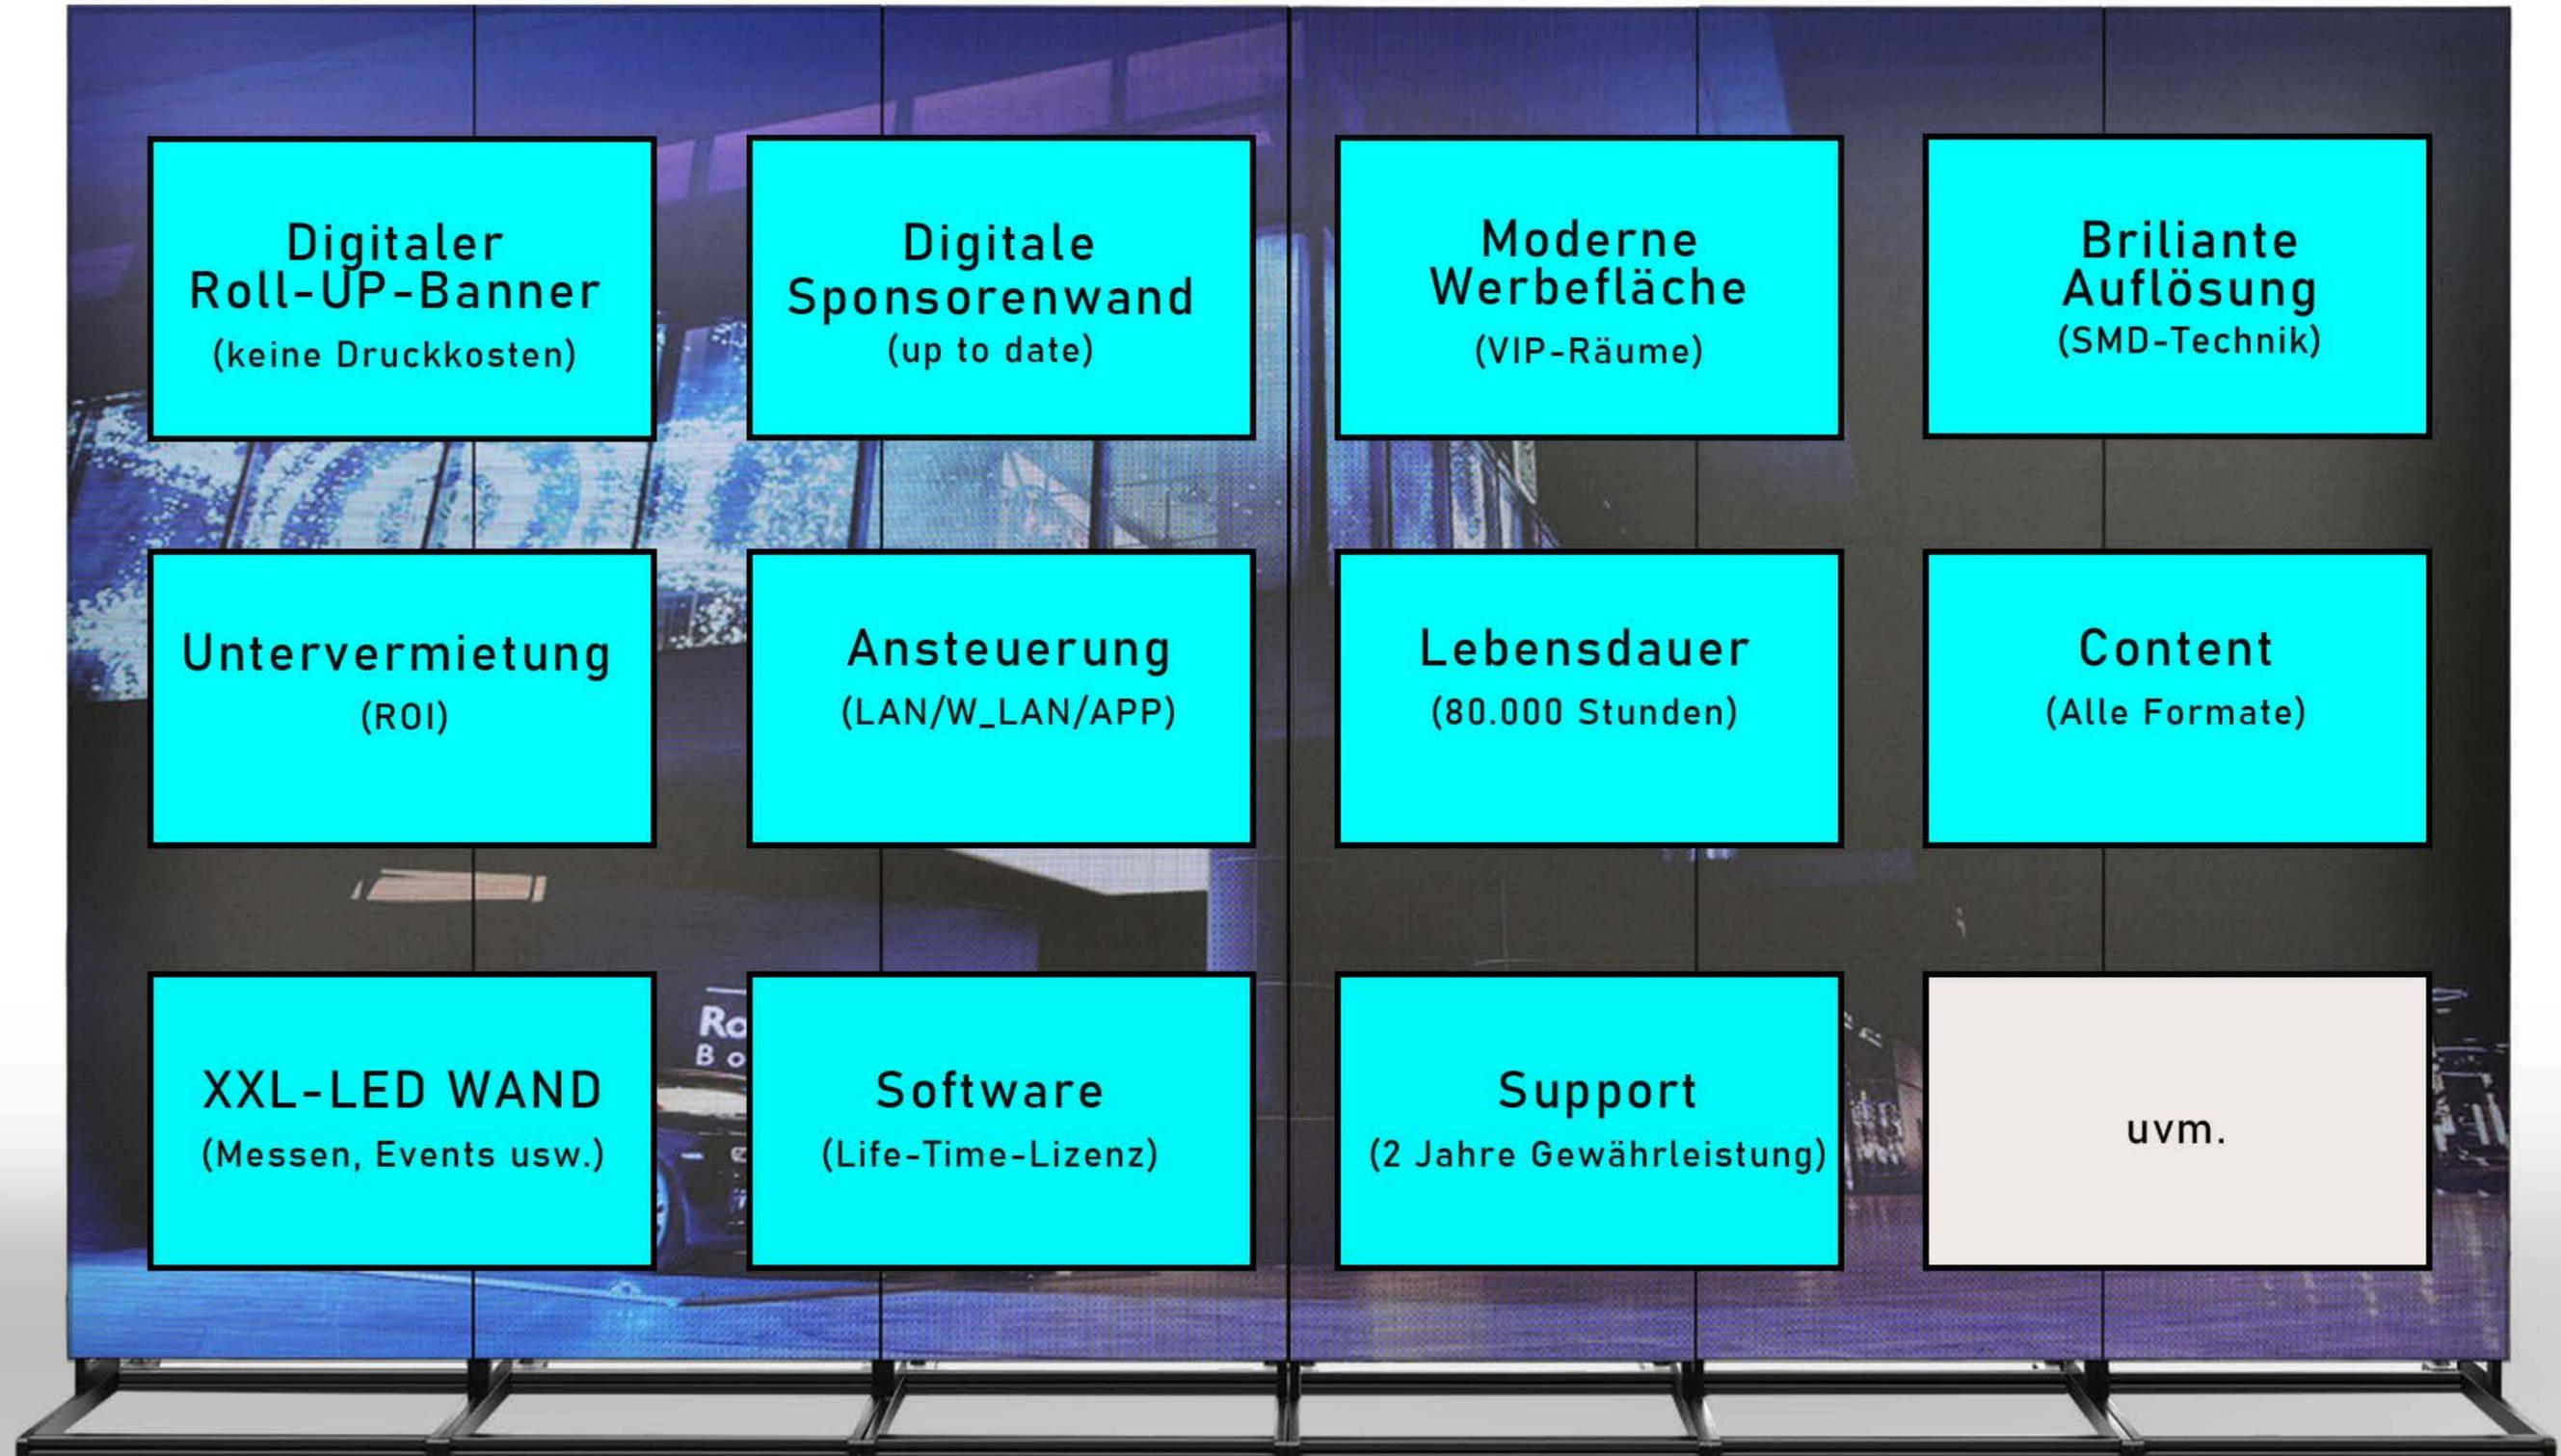

Werbe **flixi** TECHNISCHE DATEN (INDOOR)

Model Type	FLIX P2.0-I	FLIX 2.5 -I	FLIX 3 -I
Pixel pitch	2mm	2.5mm	3 mm
Destiny	250,000 dots /SQM	160,000 dots /SQM	111,111 dots /SQM
LED Type	SMD1515 Mat Black	SMD 2121 Mat Black	SMD 2121 Mat Black
Pixel type(R / G / B)	1R1G1B (3 in 1)	1R1G1B (3 in 1)	1R1G1B (3 in 1)
Module size	320 x 160mm	160 x 160mm	192 x 192mm
Module Resolution	160*80pixel	64*64pixel	64*64 pixel
Sreen Size (H*W)	640*1920mm	640*1920mm	576*1920mm
Feet Size	2.52 * 6.3 feet	2.10* 6.3 feet	1.88 * 6.3 feet
Screen Resolution	320 * 960 pixel	256 * 768 pixel	192 * 640 pixel
Frame Size	1930mm(H)*776mm(W)*45mm(T)	1930mm(H)*648mm(W)*45mm(T)	1930mm(H)*584mm(W)*45mm(T)
Case Material	Aluminum	Aluminum	Aluminum
Weight	32kg/ unit	32kg/ unit	28kg/ unit
Drive mode	1/40 Scan	1/32 Scan	1/32scan
Viewing Distance	≥ 2 M	≥ 2.5 M	≥ 3 M
Brightness	≥ 1,000 cd/m²	≥ 1,000 cd/m²	≥ 1,000 cd/m²
Viewing Angle	140° (H)/140°(V)	140° (H)/140°(V)	140° (H)/140°(V)
Refresh rate	≥1,920 Hz (3840HZ optional)	≥1,920 Hz (3840HZ optional)	≥1,920 Hz (3840HZ optional)
Input voltage	AC90-240V	AC90-240V	AC90-240V
Maximum Power Consumption	1170Wper unit	750Wper unit	600W per unit
Average Power Consumption	350Wper unit	220Wper unit	280W per unit
Control method:	Asynchronous(WIFI/USB/LAN/HDMI)	Asynchronous (WIFI/USB/LAN/HDMI)	Asynchronous (WIFI/USB/LAN/HDMI)
Temperature Operating (°C)	-40°~+75°	-40°~+75°	-40°~+75°
Working Humidity	10%-95%RH	10%-95%RH	10%-95%RH
IP Rating	IP20	IP20	IP20
Application	Indoor/ Semi-Outdoor	Indoor/ Semi-Outdoor	Indoor/ Semi-Outdoor
Certificate	CE/ROHS/FCC	CE/ROHS/FCC	CE/ROHS/FCC

Werbe **fliX**[®] TECHNISCHE DATEN (OUTDOOR)

Model Type	FLIX P2.0-0	FLIX P3.0-0
Pixel pitch	2.5mm	3mm
Destiny	160000	111111
LED Type	SMD1921	SMD1921
Pixel type(R / G / B)	1R1G1B (3 in 1)	1R1G1B (3 in 1)
Module size	160 x 160mm	192 x 192 mm
Module Resolution	64 x 64 pixel	64 x 64 pixel
LED Moudle layout(W×H)	4 x 12mm	3 x 10
Display Size	640*1920mm	576 x 1920mm
Display Resolution	256*768pixel	192 x 640pixel
Display area	1.23m ²	1.11m ²
Cabinet Size(mm)	643 x 1930mm	579 x 1930 mm
Resolution(W×H)	256 x 768	192x640
Case Material	Aluminum	Aluminum
Weight	45kg/unit	50kg /unit
Drive mode	1/32scan	1/16scan
Viewing Distance	>2m	>3m
Brightness	5000 cd/m ²	5000 cd/ m ²
Viewing Angle	140°/140°	140°/140°
Refresh rate	≥1920Hz	≥1920Hz
Input voltage	AC 240/100±10%	AC 240/100±10%
Maximum Power Consumption	1350W	1050W
Average Power Consumption	450W	315W
Control method:	Asynchronous(WIFI/USB/LAN/HDMI)	Asynchronous(WIFI/USB/LAN/HDMI)
Temperature Operating (°C)	'-10°~+40°	'-10°~+40°
Working Humidity	10%-90%	10%-90%
IP Rating	IP65	IP65
Application	Outdoor	Outdoor
Certificate	CE/ROHS/FCC	CE/ROHS/FCC

Werbe **fliX**[®] | KONTAKT

WERBEFLIX GMBH

Presentstr. 18
63939 Wörth am Main
Tel: 09372-94796-0
E-Mail: Info@info@werbeflix.de
Web: www.werbeflix.de